


MicroPositioner Data Sheet

Model # R212


Travel Range	12mm	Maximum Force (push/pull)	9 lb.
Design Resolution	0.059μm	Maximum Lateral Force	1 lb.
Minimum Increment	0.1μm	Encoder Resolution	60 counts/ revolution
Repeatability (unidirectional)	0.1μm	Power Consumption (nominal)	2 watts over voltage range or +5V to +15V
Backlash	<0.5μm		
Maximum Velocity	0.7mm / second	Required Encoder Voltage	12V min to 15V max

**The R212 MicroPositioner can be mounted by clamping around
The end collar without danger of binding the lead screw**

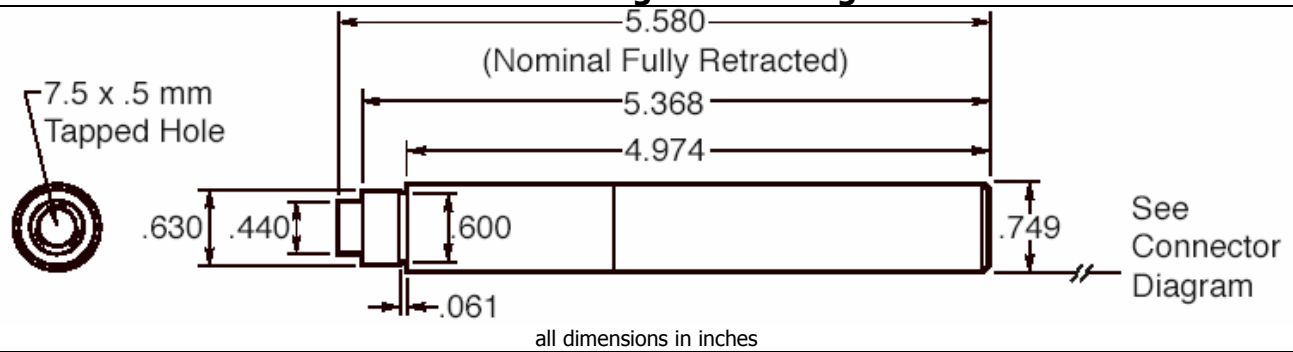


MicroPositioner Tip Options


**FLAT TIP
RT2**




**SPHERICAL
TIP RT3**

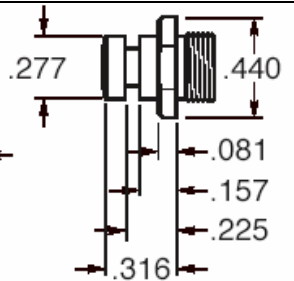


**BALL TIP
RT4**



**#6-32 TIP
TAPPED ID
RT5**

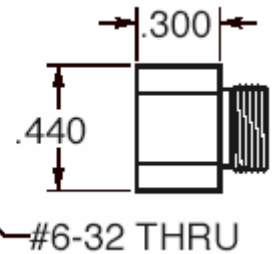

**Micropositioner #R212
Connector Diagram**



PIN OUTS

MOTOR +	1
+VDC (MAX 15V)	2
CHAN A OUT	3
CHAN B OUT	4
VDC RETURN	5
MOTOR -	6



Phresh Photonics

5737 Kanan Road: Suite #217

Agoura, Ca 91301

tel: 818-292-2479 fax 818-707-3616

www.phreshphotonics.com info@phreshphotonics.com